



# High spin hygienic barrier washer-extractors

## IH180 - IH240 - IH280

### Features

- Freestanding, high spin
- Complete stainless steel cabinet
- Stainless steel drum and tub
- Aries Elite - Fully programmable
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- Large door opening for easy loading & unloading
- Automatic door positioning
- Liquid soap connection

### Options

- USB plug (on the side panel)
- Liquid soap pumps
- Water recovery option incl. second drain valve
- Steam heating version
- Water sample tap
- Aries Assist
- Second display
- Weighing system



HYGIENIC SOLUTION



LARGE DOOR OPENING



EASY OPERATION



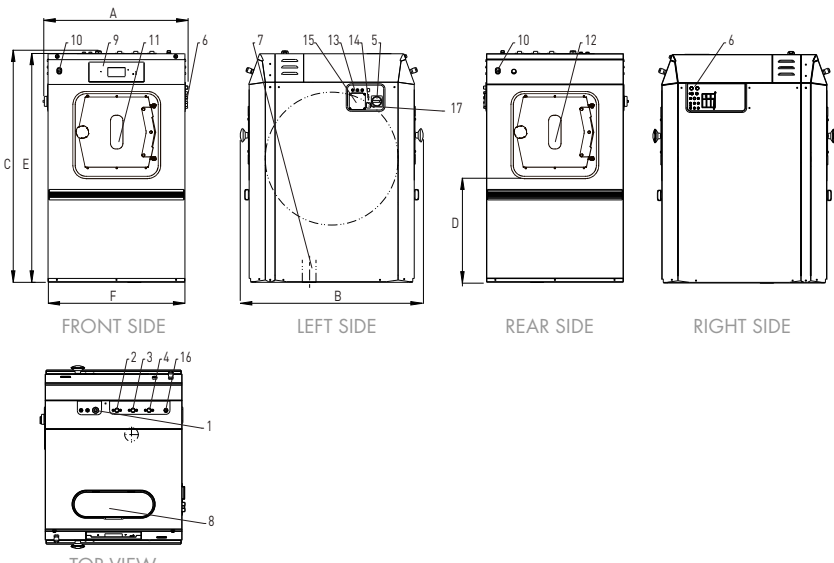
LOW WATER CONSUMPTION



LOW ENERGY CONSUMPTION

	IH180	IH240	IH280
Innerdrum			
Capacity 10:1	18 kg	24 kg	28 kg
Capacity 9:1	20 kg	27 kg	31 kg
Volume	180 l	240	280 l
Diameter	750 mm	750 mm	750 mm
Number of drums	1	1	1
Number of loading doors	1	1	1
Number of unloading doors	1	1	1
Drum speed			
Washing speed	42 rpm	42 rpm	42 rpm
Highest spin speed	939 rpm	939 rpm	914 rpm
G-factor	370	370	350
Programmer			
Aries Elite	standard	standard	standard
Cabinet			
Stainless steel	standard	standard	standard
Heating			
Electrical	12/18 kW	18 kW	21,9 kW
Steam	3-8 bar	3-8 bar	3-8 bar
Connections			
Electrical	3x19 mm (3/4")		
Water inlet	13 mm (1/2")		
Steam inlet	13 (1/2) mm (in)		
Transport data			
Gross weight	485 kg	515 kg	550 kg
Net weight	430 kg	460 kg	490 kg
Packing dimensions HxWxD	1610x1010x1235 mm	1610x1130x1235 mm	1610x1240x1235 mm

	A	B	C	D	E	F	Door dimensions		
IH180	900	1145	1455	655	1423	850	IH180	325	376
IH240	1020	1145	1455	675	1423	970	IH240	325	496
IH280	1130	1145	1455	670	1423	1080	IH280	325	496
	width	depth	height					height	width

- 1 Electrical connection
- 2 Hot water
- 3 Cold water hard
- 4 Cold water soft
- 5 Main switch
- 6 Liquid soap connection
- 7 Drain
- 8 Soap dispenser
- 9 Control panel
- 10 Button CENTRALSTOP
- 11 Loading door
- 12 Unloading door
- 13 Fuses
- 14 USB port
- 15 Electrical connection to liquid soap pumps
- 16 Steam supply
- 17 Aries Assist connection